

Need a fast quote or custom sizing? Contact us now:

Email: chuqifilter@chuqimat.com **WhatsApp:** [+86 19153383344](https://wa.me/+8619153383344) **Web:** www.chuqi-airfilter.com



ZIBO CHUQI NEW MATERIAL TECHNOLOGY CO., LTD.



HEPA With Separator



FEATURES

- High efficiency, low resistance, good uniformity winds
Applicable to various local purification equipment and clean workshop end purification


MATERIALS AND OPERATING CONDITIONS

- External frame: Aluminum alloy steel casing outside, the casing outside the box, stainless steel
Sealant: Gel-glue
Separator: Aluminum foil
Gasket: EVA
Filter media: fiber glass paper H10, H11, H12, H13, H14, U15
Efficiency: 95%0.3um, 99%0.3um, 99.9%0.3um, 99.99%0.3um, 99.999%0.3um, 99.9995%0.12um
Maximum Operating Temp and Humidity: 80°C, 80%

TECHNICAL DATA


Air Flow-Resistance Curve

610 x 610 x 292




Air Flow-Resistance Curve

610 x 610 x 292



Three Views of Filter

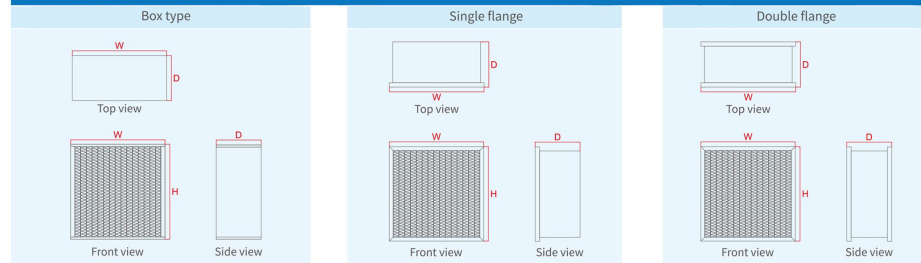

SPECIFICATION

Dimension	Rated Air Flow	Initial resistance	Efficiency (class)
305 x 305 x 150/220/292mm	400/700/900m³/h	≤220Pa	95-99.9995% (Dust-spot)
320 x 320 x 150/220/292mm	400/700/900m³/h		
484 x 484 x 150/220/292mm	1000/1600/2000m³/h		
610 x 610 x 150/220/292mm	1600/2500/3200m³/h		
630 x 630 x 150/220/292mm	1700/2700/3400m³/h		