

Need a fast quote or custom sizing? Contact us now:

Email: chuqifilter@chuqimat.com **WhatsApp:** [+86 19153383344](https://wa.me/+8619153383344) **Web:** www.chuqi-airfilter.com



ZIBO CHUQI NEW MATERIAL TECHNOLOGY CO., LTD.



V Bank Filter





FEATURES

- High efficiency, uniform air speed, long service life
Applicable to the terminal filtration and air conditioning unit area where large volume needed

MATERIALS AND OPERATING CONDITIONS

- External frame: ABS plastic rigid box, or metallic casing
Sealant: polyurethane
separator: aluminum foil
Gasket: EVA
Media: fiber glass paper F6-H14; Synthetic media F6-H13
Maximum Operating Temp and Humidity: 80°C, 80%

TECHNICAL DATA

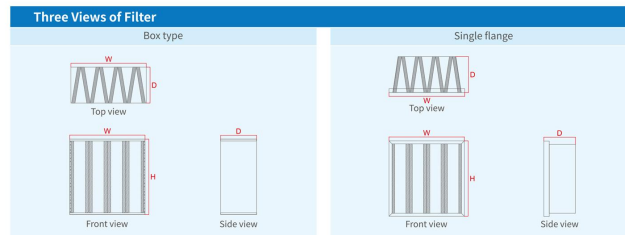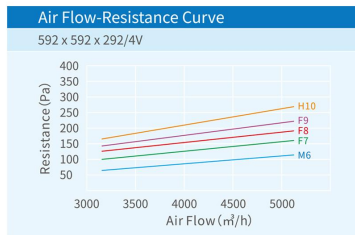

SPECIFICATION

Dimension 外形尺寸	Rated Air Flow 额定风量	Initial resistance 初阻力			Media 滤料型号	Dust Holding Capacity 容尘量
		Medium 中效	Sub-HEPA亚高效	HEPA高效		
592 × 287 × 292mm	1500m³/h	≤200Pa	≤250Pa	≤400Pa	glass fiber	400g
592 × 490 × 292mm	2400m³/h					700g
592 × 592 × 292mm	3000m³/h					800g
610 × 305 × 292mm	1700m³/h					450g
610 × 610 × 292mm	3400m³/h					900g
592 × 287 × 292mm	1500m³/h	≤120Pa	≤200Pa	≤300Pa	polyester fiber	400g
592 × 490 × 292mm	2400m³/h					700g
592 × 592 × 292mm	3000m³/h					800g
610 × 305 × 292mm	1700m³/h					450g
610 × 610 × 292mm	3400m³/h					900g